



SEAL·A·TRON

Shrink Packaging Equipment

SHRINK TECH SYSTEMS

SEGMENT 1

KRX COMBINATION L-BAR SEALER & SHRINK TUNNEL

EQUIPPED
TO OUR NEW
ADJUSTABLE
STAND

L-BAR SEALER

Standard Features:

SEAL BAR DIMENSIONS: 16" W x 20" L x 6" H

Variable Speed Discharge Conveyor

- Holds Up to a 20" W Roll of Film
- Tru-Temp Digital Seal Wire Control
- Mag-LOK Extra Strong Magnets
- Lightly Balanced Seal Head Pivot
- EZ-Perf Venting Pin Perf
- Proximity Sensor Switching for Impulse Seal Wires
- Anodized Aluminum Seal Head with Film Clamps
- Heavy Duty Welded Frame with Locking Casters

Power Required: 120 VAC 15 Amp Service



SHRINK TUNNEL



Standard Features:

TUNNEL DIMENSIONS: 19" W x 10" H x 30" L

- GFN Conveyor Belt
- Kool Touch Exterior
- 4-Sided Surround Air Flow
- Digital Temperature Controls
- Cool Down Cycle
- Direct Drive Brushless Drive Motor with Inverter Drive
- Heavy Duty Shafts and Bearings



Standard Digital Temp Controls

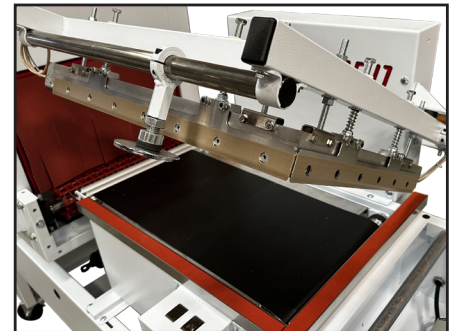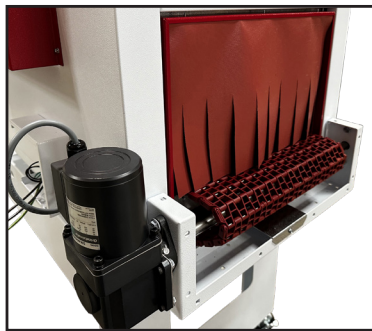

Options:

- Hot Knife Seal Bars